


STROCO Highflow – Circulation pump

High performance, low energy consumption

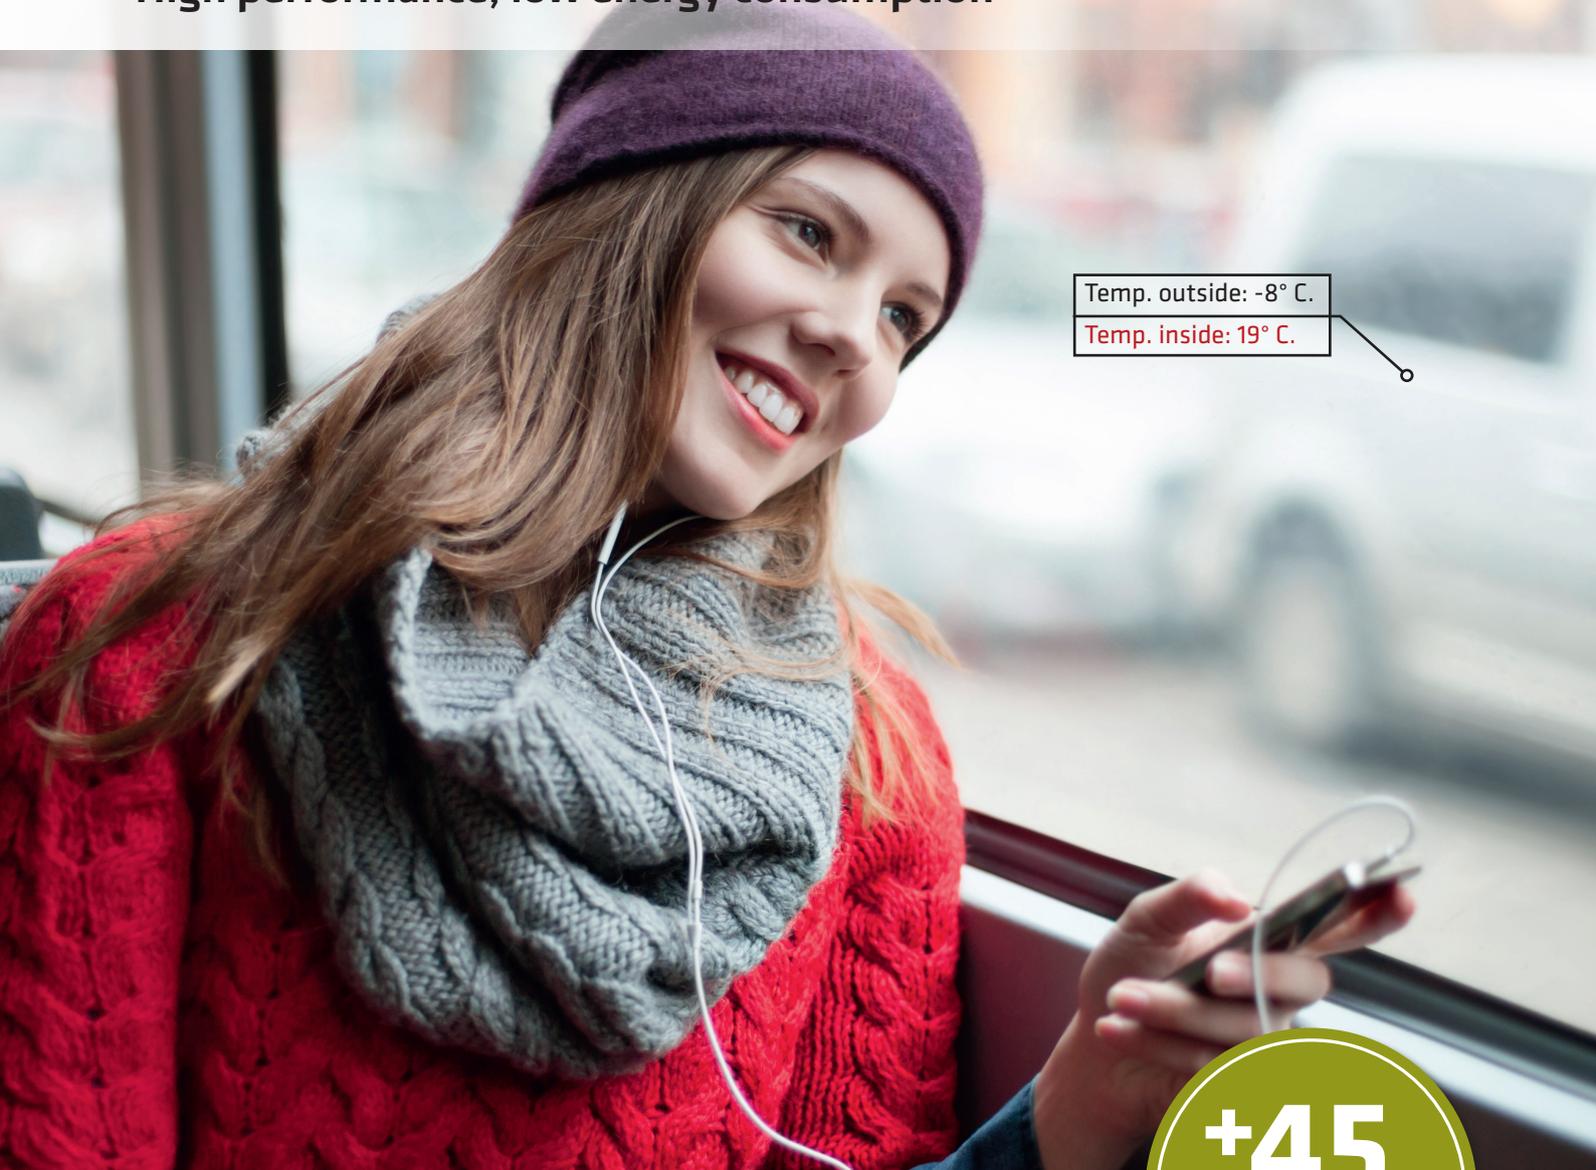

Temp. outside: -8° C.

Temp. inside: 19° C.

+45
years
experience

strocco
MOBILE HEATING SOLUTIONS

STROCO Highflow – Circulation pump


STROCO Highflow – Circulation pump is innovative. The brushless motor ensures unprecedented service life and provides high performance despite low energy consumption. The pump is extremely reliable in operation and the built-in softstart function prevents shock load of both the electrical system and the heating circuit. The Circulation pump is available in two variants: Highflow with a performance of 6000 l/h and Highflow+ with a performance of 7200 l/h.

ADVANTAGES:

- High performance
- Low energy consumption
- Reliable in operation
- Built-in softstart function
- Two variants



Pump diagram for 6000 & 7200

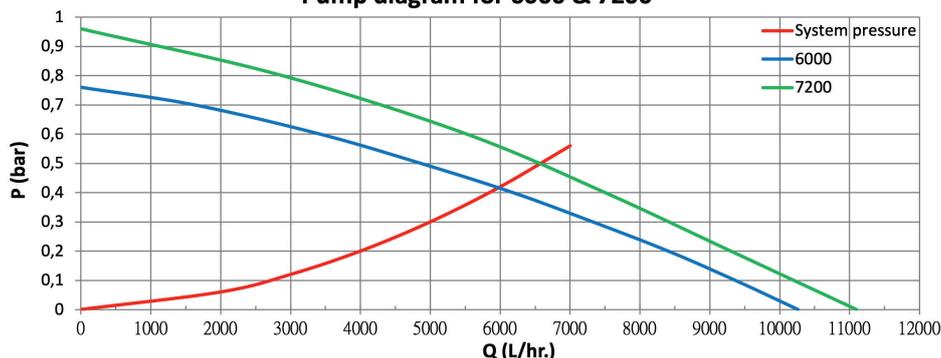

TECHNICAL DATA:

| | | | |
|-----------------------|---------------------|---------|--------|
| Highflow (no. 35470) | 6000 l/h at 0,4 bar | Length: | 246 mm |
| Highflow+ (nr. 35472) | 7200 l/h at 0,4 bar | Width: | 100 mm |
| Operating voltage: | 18 - 30,5V | Height: | 112 mm |
| Rated voltage: | 24 V | Weight: | 2 kg |
| Amperage: | 6,6 A | | |
| Effect: | 158 W | | |
| Connection: | 38 mm | | |

stroco
MOBILE HEATING SOLUTIONS

Stroco ApS

Banealle 8H, DK - 8450 Hammel

Phone: +45 86 96 10 66 e-mail: info@stroco.dk

www.stroco.dk

FREE
PHONE SUPPORT
DAY-TO-DAY SUPPLY
OF SPARE PARTS